
J-54S

Facial Recognition Terminal

Face, IC card, password, fingerprint and palmprint verification in one terminal.

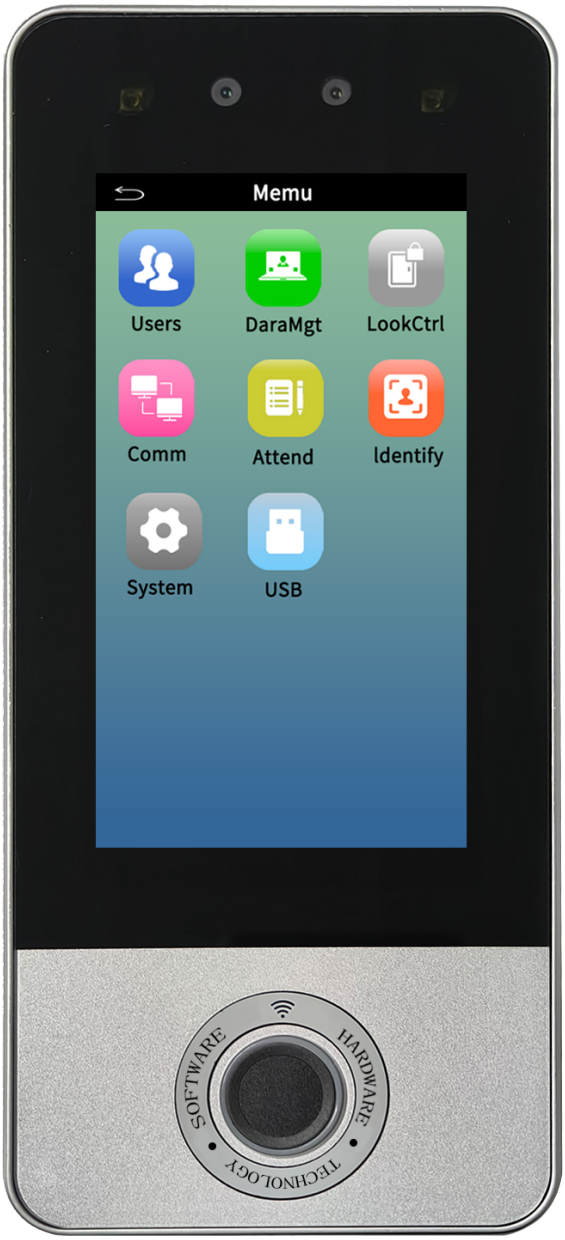

10,000 / 5,000

Users / Faces

200,000

Records

5-inch IPS display

High-definition display

IP65

Protection rating

Five verification methods

Face / IC card / Password / Fingerprint / Palmprint

TCP/IP and USB

TCP/IP, USB (Wi-Fi/4G optional)

Biometric capacity

5,000 fingerprints; 1,000 palmprints.

Compact dimensions

198 x 86 x 17 mm

victorliu@fusworth.com
www.fusworth.com
+86 188 2005 8250

Specifications

J-54S | Facial Recognition Terminal

General	
Device Category	Facial Recognition Terminal
Operating System	Linux
Camera	MIPI+MIPI 2 MP
Screen	5-inch IPS high-definition display
Touch Panel	Capacitive touchscreen
Language	Simplified Chinese, English
Power Supply	DC12V/2A
Operating Temperature & Humidity	-30 to 60 deg C; 10-90% RH
Dimensions	198 x 86 x 17 mm
Protection Rating	IP65 waterproof and dustproof
Housing Material	Aluminium alloy
Identification	
Liveness Detection	Dual-camera liveness detection
Recognition Speed	<0.5s
Verification Methods	Face / IC card / Password / Fingerprint / Palmprint
Card Reading	Standard IC card reader
Capacity	
User Capacity	10,000
Face Capacity	5,000
Fingerprint Capacity	5,000
Palmprint Capacity	1,000
Card Capacity	10,000
Password Capacity	10,000
Record Capacity	200,000
Communication and Interfaces	
External Interfaces	Wiegand output (26/34), relay output, exit button, doorbell
Communication Method	TCP/IP, USB (Wi-Fi/4G optional)