
# JF-42S

## Facial Recognition Terminal

Face / IC card / Password / Fingerprint / Palmprint verification.

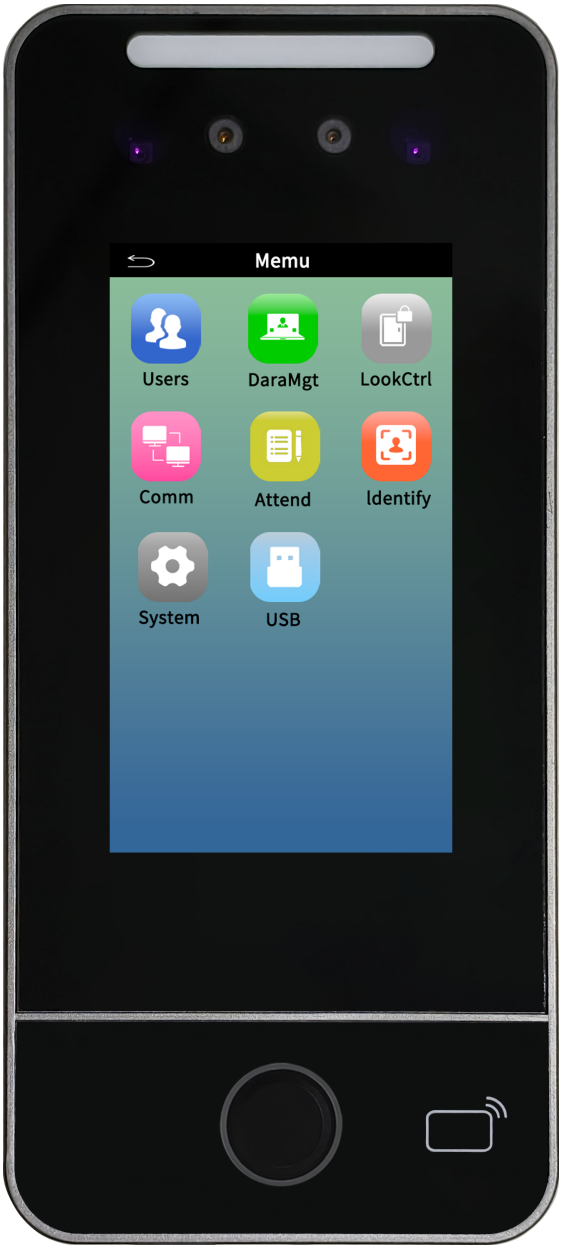


## 10,000 / 5,000

Users / Faces

## 200,000

Records

### 4-inch IPS HD display

High-definition display

## IP65

### Verification methods

Face / IC card / Password / Fingerprint / Palmprint

### Communication

TCP/IP, USB (optional Wi-Fi/4G)

### Biometric capacity

5,000 fingerprints; 1,000 palmprints.

### Dimensions

192 × 86 × 22 mm

victorliu@fusworth.com
www.fusworth.com
+86 188 2005 8250

# Specifications

JF-42S | Facial Recognition Terminal

| | |
|---|---|
| **General** | |
| Device Category | Facial Recognition Terminal |
| Operating System | Linux |
| Camera | MIPI+MIPI 2 MP |
| Screen | 4-inch IPS high-definition display |
| Touch Panel | Capacitive touchscreen |
| Language | Simplified Chinese, English |
| Power Supply | DC12V/2A |
| Operating Temperature & Humidity | -30 to 60 deg C; 10-90% RH |
| Dimensions | 192 × 86 × 22 mm |
| Protection Rating | IP65 waterproof and dustproof |
| **Identification** | |
| Liveness Detection | Dual-camera liveness detection |
| Recognition Speed | <0.5s |
| Verification Methods | Face / IC card / Password / Fingerprint / Palmprint |
| Card Reading | Standard IC card reader |
| **Capacity** | |
| User Capacity | 10,000 |
| Face Capacity | 5,000 |
| Fingerprint Capacity | 5,000 |
| Palmprint Capacity | 1,000 |
| Card Capacity | 10,000 |
| Password Capacity | 10,000 |
| Record Capacity | 200,000 |
| **Communication and Interfaces** | |
| External Interfaces | Wiegand output (26/34), relay output, exit button, doorbell |
| Communication Method | TCP/IP, USB (optional Wi-Fi/4G) |